

item number	L	H	w eight	max. load F per L/2
	mm	mm	kg/pc	kN
<b>DLN 100_S</b>	110	60	0,16	0,6
<b>DLN 150_S</b>	160	60	0,22	0,6
<b>DLN 200_S</b>	210	80	0,30	0,6
<b>DLN 300_S</b>	320	85	0,43	0,6




product description: The bracket is used as an element to create a supporting structure for a cable tray.

The holder is intended for fixing on the wall or on the ceiling profile.

For mounting on the ceiling profile SPL, the sliding nuts PM 41 M 10 will be used together with bolt S 10X20.

Fix to the ceiling profile SPLN, SPSN or SPU using bolts S 10X20, nuts M 10 and washer PD 10.

Cable tray will be attached to the DL holder using the bolts NSM 6X10.

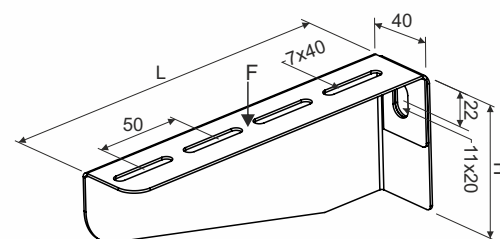

finish surface: S - Pre-Galvanized, zinc-layer 15 - 27 µm

sales amount: á 1 pc

storage: EN 60721-3-1

