


type number: **KL 60X150_S; KL 60X150_F** width of cable ladder (A) 150 mm
KL 60X200_S; KL 60X200_F width of cable ladder (A) 200 mm
KL 60X300_S; KL 60X300_F width of cable ladder (A) 300 mm
KL 60X400_S; KL 60X400_F width of cable ladder (A) 400 mm

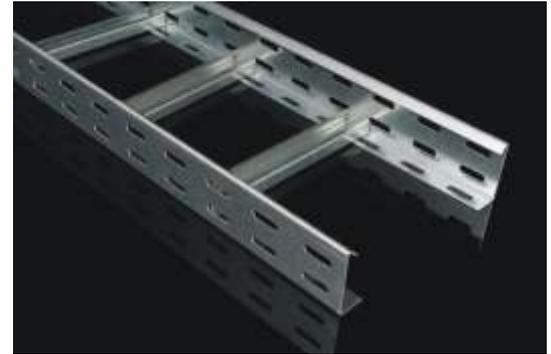

height of cable ladder: 60 mm

length of cable ladder: 3000 mm

distance of cross-piece: 150 mm

thickness of metal sheet: side of cable ladder - 1,5 mm
 cross-piece of cable ladder - 1,2 mm


product description: The cable ladder is suitable for creating cable trays with maintained functionality during fires.
 Perforated sidewalls create the L-profile with a bended edge.
 Perforated cross-pieces of the C-profile are attached to the sidewalls by pressing through in the distance of 150 mm with the open side of the profile upwards.

The distance of cross-piece of cable ladders for standardized supporting constructions is 150 mm.

Cable ladders may be also used as an vertical line maintaining operability in fire, the KLSU angle part is intended for mounting on the wall.

For the connecting use the designated couplings KPBSKL.

For ladders it is possible to use accessories of cable trays JUPITER.

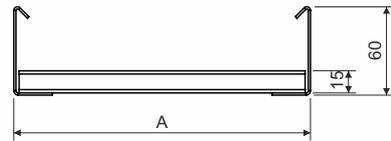

surface finish: PO - Pre-Galvanized, zinc-layer 15 - 27 µm
 POF - Hot Dip Galvanized, zinc-layer 50 - 100 µm

sales amount: á 3 m

meets the requirements: EN 61537:02

classification: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification is depend on the specific conditions of the cable ladder, detailed in the catalogue Systems with maintained functionality in fire.
 Systems may be supplied with various surface finishes whereas the surface finish does not affect the determined maintained time of operability in fire.

storage: EN 60721-3-1

