


item number	height (H)	for the height of cable ladder / tray	thickness of metal sheet	weight	
	mm	mm	mm	kg/pc	
S 35X200_S	25	35	1,2	0,04	
S 35X200_ZM					
S 60X200_S	50	60	1,5	0,09	🔥🔥
S 60X200_ZM					🔥🔥
S 85X200_S	75	85	1,5	0,13	
S 85X200_ZM					
S 110X200_S	100	110	1,5	0,18	🔥
S 110X200_ZM					🔥

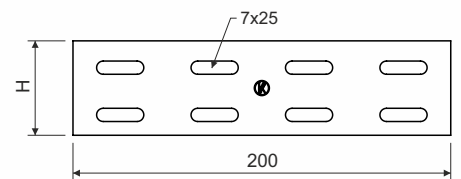

product description:

The coupling is used to connect cable ladders or JUPITER cable trays without integrated coupling.

Attached using NSM 6X10 screws, that meet the requirement for conductive bonding according ČSN EN 61537:02. To protect the cables, the bolt head is inside the cable tray.

ZM surface finish coupling shall be used for ZM or F surface finish trays.

GMT surface finish bolts shall be used for ZM or F surface finish trays.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount:

1 pc

meets the requirements:

ČSN EN 61537:02

classification 🔥:

ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

- 🔥 products approved for standard constructions
- 🔥 products approved for non-standard constructions

storage:

ČSN EN 60721-3-1

