

type number	weight (kg/pc)
NKSJ_F	0,45

product description: The bracket is designed to anchor the mounting profile on the ceiling or floor.


The fixing is carried out by the bolt S 10X40

These items can also be ordered in a varnished version.

surface finish: F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

storage: ČSN EN 60721-3-1

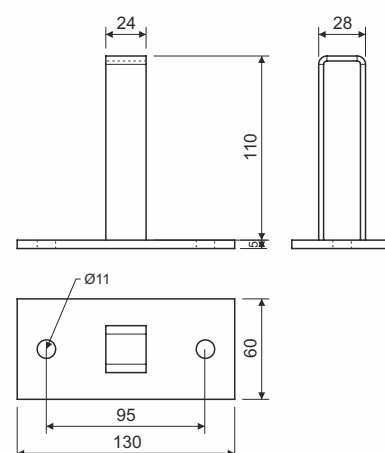

WARNING

Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NKSJ



cardboard